


fullstop[®]
SECURITY

Model. FSHP10-4

FOOTRESS

Security Hitch Post

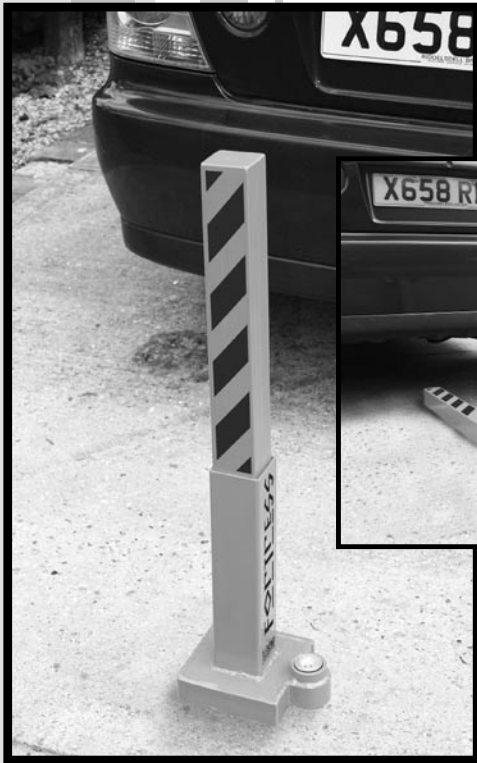


User Manual

Rev.A 09-04



by  **purpleline**[®]

Parts Identification & Installation

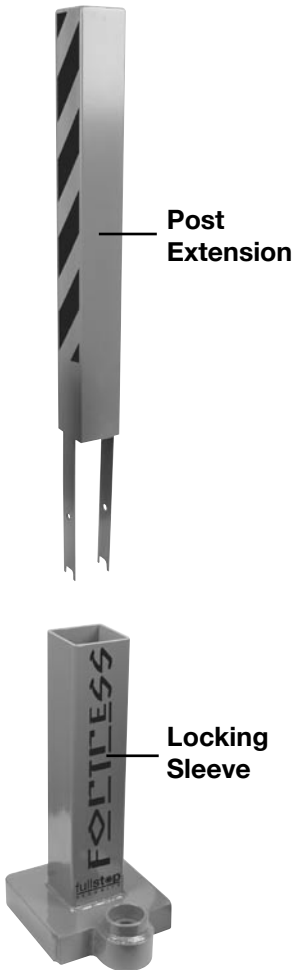

The post can be installed into a concrete base using either the ground anchor or the 4 anchor bolts (for best security use both). If using both methods, ensure that the cross bars from the ground anchor do not obstruct the bolts.

The base plate must be positioned on top of the concrete foundation to enable the sleeve to fit over it. This means the correct distance is achieved for proper fitment of the barrel lock.

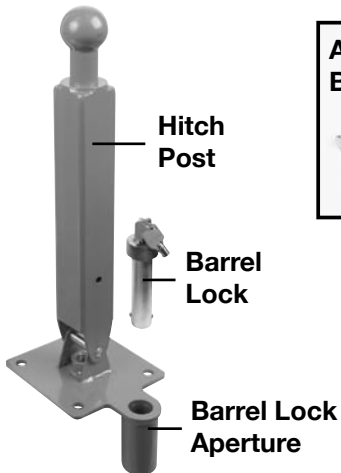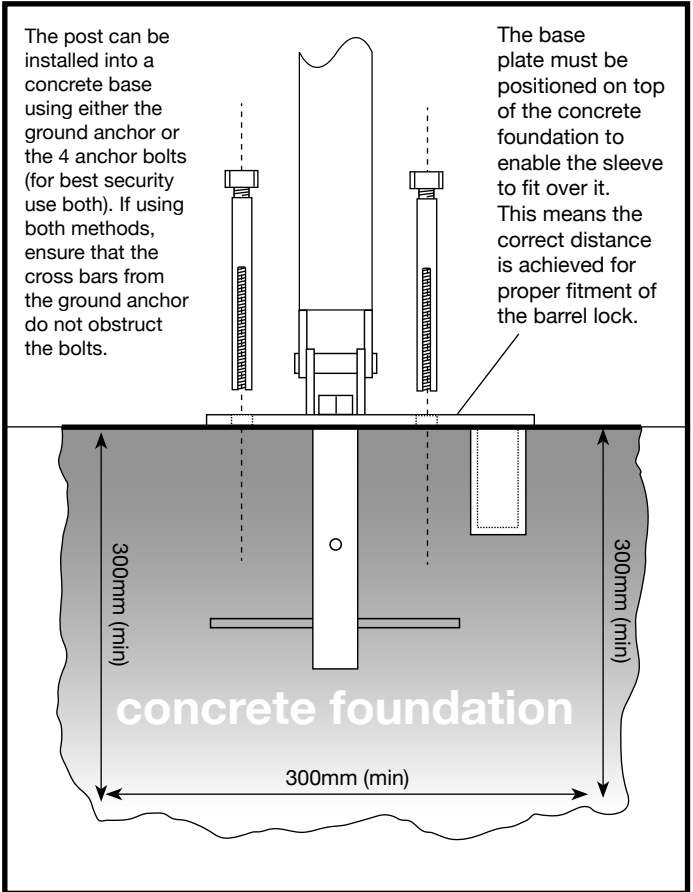

Your Security Hitch Post

The FullStop® Fortress Security Hitch Post gives you the peace of mind that your valuable mobile property is protected.

In order to ensure optimal use of your security hitch post, we recommend that you read this manual completely.

Installation

Important: For the most secure fitting, site in concrete. Do not install on loose ground.

Decide on installation position and excavate hole minimum 30cm³.

Attach the ground anchor to the base plate by screwing into the underside of the base plate. Mount in concrete ensuring a flush fit to ground level and that the post will be vertical when upright (see diagram). Use a wooden batten to support the post as necessary during installation.

Fit fixing bolts.

Once installed the Fortress can be used as either a full height post, by sliding the post extension onto the hitch post and securing into position. The locking sleeve then slides down over the post extension and the hitchpost and covers the base plate. Fit the barrel lock into it's aperture through the base of the sleeve and into the base plate. Once locked, the sleeve cannot be removed which prevents the post from being hinged flat to gain access.

Alternatively, use the Fortress as a hitch post by performing the same operation as above but without including the post extension. When used in conjunction with the *FullStop® Saracen* Hitch Lock, the caravan or trailer is secured to the post.

Maintenance

Fit protective cap to lock barrel to help prevent ingress of dirt or water. Thereafter spray the outside of the lock body with a light oil such as WD-40 or equivalent every sixteen weeks.



Disclaimer

If used properly, your FullStop product will be an effective deterrent. However, nothing can stop the efforts of the most determined thief, and to this end no liability is accepted for any loss and/or damage caused by any illegal activity including theft or vandalism. Liability also not accepted for any loss and/or damage arising from misuse, unauthorised repair or alteration and failure to follow the user guide directions. No form of consequential loss what so ever will be accepted.



© Copyright 2007. Purple Line Limited.

Web: www.fullstop-security.com **E-mail:** support@fullstop-security.com **Tel:** 0870 444 8688

Photographs for illustration purposes only. Actual product may differ slightly.

Purple line Limited reserve the right to alter product specification without prior notice.